

EL-4555

EL SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

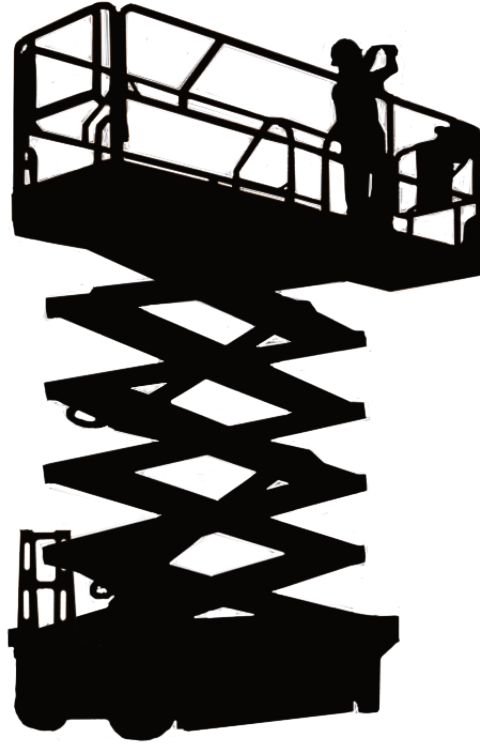


IMAGE COMING SOON

STANDARD FEATURES

- ▶ Electric drive
- ▶ Indoor & outdoor operation settings
- ▶ 110V power-to-platform
- ▶ Proportional controls
- ▶ 30A Charger
- ▶ Non-slip deck
- ▶ All motion alarm
- ▶ Flashing beacon
- ▶ Removable platform controls
- ▶ Self-locking gate
- ▶ Lifiable with forklift or crane
- ▶ Dual Maintenance bars
- ▶ Onboard diagnostic system
- ▶ Manual decent cable
- ▶ Active tilt alarm
- ▶ Slide out extension
- ▶ Automatic pothole protection
- ▶ Non-marking tires
- ▶ Horn
- ▶ CAN communication protocol
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

STANDARDS COMPLIANCE

- ▶ ANSI A92.20

OPTIONS

- ▶ Tool Tray
- ▶ Pipe Rack

PRELIMINARY BROCHURE

SUBJECT TO CHANGE

EL-4555

EL SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

SPECIFICATIONS

A	Working Height (2 Person Indoor)	51.1 ft	15.6 m
	Outdoor Working Height (1 Person Outdoor)		
B	Platform Height Maximum (2 Person Indoor)	45.1 ft	13.75 m
	Outdoor Platform Height Maximum (1 Person Outdoor)		
C	Platform Height Minimum	59.5 in	1.51 m
D	Ground Clearance Elevated	0.79 in	2 cm
E	Ground Clearance Lowered	4.7 in	12 cm
F	Overall Length w/ Step	109.8 in	2.79 m
G	Overall Width	55 in	1.39 m
H	Stowed Height (Rails Unfolded)	103.9 in	2.64 m
	Stowed Height (Rails Folded)	81.5 in	2.07 m
I	Platform Length	105.5 in	2.68 m
J	Platform Width	46.5 in	1.18 m
K	Slide Out Extension Deck Length	39.4 in	1 m
	Wheelbase	87.4 in	2.22 m
	Tires	15 x 5 in	38 x 12.7 cm

PERFORMANCE

Rated Occupancy (Indoor/Outdoor)	2/1 Person(s)	
Platform Capacity	595 lbs	269.9 kg
Slide Out Extension Deck Capacity	297.6 lbs	135 kg
Gradeability	25%	
Drive Speed Elevated (Proportional)	0.37 mph	0.6 kph
Drive Speed Lowered (Proportional)	2.8 mph	4.5 kph
Working Slope	2°/3°	
Weight	7,716.2 lbs	3,500 kg

POWER

Hydraulic Tank Capacity	7.9 gal	30 L
Battery	4 x 12V 105 Ah	

