

# PS-1930 PRO SERIES

## SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



## THE PROFESSIONAL TRADES LIFT OF CHOICE TO ACCESS MORE JOBS...

### STANDARD FEATURES

- ▶ Proportional controls
- ▶ Electric drive & steer
- ▶ 110V-AC power-to-platform
- ▶ LeakGuard™ ready
- ▶ Indoor/outdoor operation settings
- ▶ Horn
- ▶ Maintenance charger
- ▶ Intelligent control system
- ▶ Manual descent pull cable
- ▶ Dual maintenance locks
- ▶ Active tilt alarm
- ▶ Active load-sensing
- ▶ Low floor load pressures
- ▶ Pothole protection
- ▶ Forklift pockets
- ▶ 8 in inside turn radius
- ▶ EZ-Glide slide out
- ▶ 30% gradeability
- ▶ Solid rubber, non-marking wheels
- ▶ Default upper control setting
- ▶ No folding rails
- ▶ Recessed charger & power-to-platform outlets in base
- ▶ Cantilever gate
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

### OPTIONS

- ▶ LeakGuard™ Fluid Containment System
- ▶ Flashing beacon
- ▶ AGM batteries
- ▶ Inverter
- ▶ All motion alarm

### STANDARDS COMPLIANCE

- ▶ ANSI A92.20
- ▶ CSA B354.6:17
- ▶ EN-280:2013+A1:2015



# PS-1930




## PRO SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

SPECIFICATIONS			
<b>A</b>	Working Height (1 Person Indoor)	<b>24.4 ft</b>	7.4 m
	Working Height (2 Person Indoor/1 Person Outdoor)	<b>18 ft</b>	5.5 m
<b>B</b>	Platform Height Maximum (1 Person Indoor)	<b>18.4 ft</b>	5.6 m
	Platform Height Maximum (2 Person Indoor/1 Person Outdoor)	<b>12 ft</b>	3.7 m
<b>C</b>	Platform Height Minimum	<b>31 in</b>	78.7 cm
<b>D</b>	Ground Clearance Elevated	<b>0.3 in</b>	0.8 cm
<b>E</b>	Ground Clearance Lowered	<b>3 in</b>	7.6 cm
<b>F</b>	Overall Length w/ Step	<b>69.5 in</b>	176.5 cm
<b>G</b>	Overall Width	<b>30 in</b>	76.2 cm
<b>H</b>	Stowed Height	<b>74.3 in</b>	188.7 cm
<b>I</b>	Platform Length	<b>57.8 in</b>	146.8 cm
<b>J</b>	Platform Width	<b>21.8 in</b>	55.4 cm
<b>K</b>	Slide Out Extension Deck Length	<b>30 in</b>	76.2 cm
	Tires (Front/Rear)	<b>12/12 in</b>	30.5/30.5 cm

PERFORMANCE			
Rated Occupancy (Indoor/Outdoor)	<b>2/1 Person(s)</b>		
Platform Capacity	<b>650 lbs</b>	294.8 kg	
Slide Out Extension Deck Capacity	<b>250 lbs</b>	113.4 kg	
Gradeability	<b>30%</b>		
Inside Turn Radius	<b>8 in</b>	20.3 cm	
Drive Speed Elevated (Proportional)	<b>0.6 mph</b>	0.3 m/s	
Drive Speed Lowered (Proportional)	<b>2.4 mph</b>	1.1 m/s	
Lift Speed (Up/Down)	<b>28/28 sec</b>		
Power Source	<b>24V DC</b>		

FLOOR LOADING			
Weight	<b>1985 lbs</b>	900.4 kg	
Wheel Load at Minimum Capacity	<b>107 psi</b>	737.7 kPa	
Wheel Load at 500 lbs Capacity	<b>122.2 psi</b>	842.5 kPa	
Wheel Load at Maximum Capacity	<b>126.7 psi</b>	873.6 kPa	

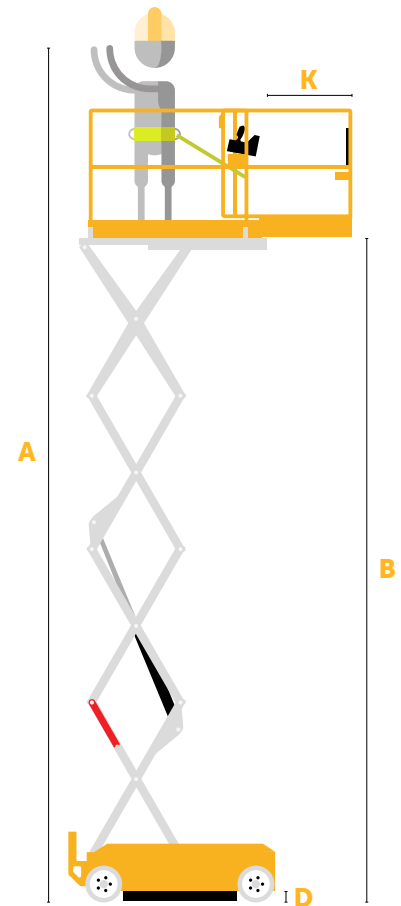

This brochure is for illustrative purposes only and based on the latest information available at the time of printing. Hy-Brid Lifts™ reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Hy-Brid Lifts™ is a trademark of Custom Equipment LLC. ©2022 Custom Equipment LLC. All rights reserved.  
03|21 Part No. PS-0003