

# ZT-1230

## ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM



### THE ULTIMATE COMPACT LIFT WITH PRECISION MANEUVERABILITY...

#### STANDARD FEATURES

- ▶ Proportional controls
- ▶ Electric drive & steer
- ▶ 110V-AC power-to-platform
- ▶ USB ports
- ▶ Horn
- ▶ Maintenance charger
- ▶ Total Control Drive System
- ▶ Hour meter
- ▶ Manual descent pull cable
- ▶ Active tilt alarm
- ▶ Active load-sensing
- ▶ Low floor load pressures
- ▶ Pothole protection
- ▶ Forklift pockets
- ▶ Zero-turn radius
- ▶ EZ-glide slide out
- ▶ 25% gradeability
- ▶ Solid rubber, non-marking wheels
- ▶ Lanyard attach points
- ▶ No folding rails
- ▶ Locking front wheel casters
- ▶ Removable platform controls
- ▶ Cantilever gate
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

#### OPTIONS

- ▶ Flashing beacon
- ▶ Inverter
- ▶ All motion alarm

#### STANDARDS COMPLIANCE

- ▶ ANSI A92.20
- ▶ CSA B354.6:17



# ZT-1230

## ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

### SPECIFICATIONS




<b>A</b>	Working Height (1 Person Indoor)	<b>18 ft</b>	5.5 m
<b>B</b>	Platform Height Maximum (1 Person Indoor)	<b>12 ft</b>	3.7 m
<b>C</b>	Platform Height Minimum	<b>21 in</b>	53.3 cm
<b>D</b>	Ground Clearance Elevated	<b>0.5 in</b>	1.3 cm
<b>E</b>	Ground Clearance Lowered	<b>3.6 in</b>	9.1 cm
<b>F</b>	Overall Length w/ Step	<b>62 in</b>	157.5 cm
<b>G</b>	Overall Width	<b>30 in</b>	76.2 cm
<b>H</b>	Stowed Height	<b>65 in</b>	165.1 cm
<b>I</b>	Platform Length	<b>53 in</b>	134.6 cm
<b>J</b>	Platform Width	<b>24 in</b>	61 cm
<b>K</b>	Slide Out Extension Deck Length	<b>30 in</b>	76.2 cm
	Tires (Front/Rear)	<b>8/12 in</b>	20.3/30.5 cm

### PERFORMANCE

Rated Occupancy (Indoor)	<b>1 Person</b>	
Platform Capacity	<b>650 lbs</b>	294.8 kg
Slide Out Extension Deck Capacity	<b>250 lbs</b>	113.4 kg
Gradeability	<b>25%</b>	
Inside Turn Radius	<b>Zero</b>	
Drive Speed Elevated (Proportional)	<b>0.9 mph</b>	0.4 m/s
Drive Speed Lowered (Proportional)	<b>2.7 mph</b>	1.2 m/s
Lift Speed (Up/Down)	<b>18/18 sec</b>	
Power Source	<b>24V DC</b>	

### FLOOR LOADING

Weight	<b>1675 lbs</b>	759.8 kg
Wheel Load at Minimum Capacity	<b>134.9 psi</b>	930.1 kPa
Wheel Load at 500 lbs Capacity	<b>166.6 psi</b>	1148.7 kPa
Wheel Load at Maximum Capacity	<b>177.5 psi</b>	1223.8 kPa

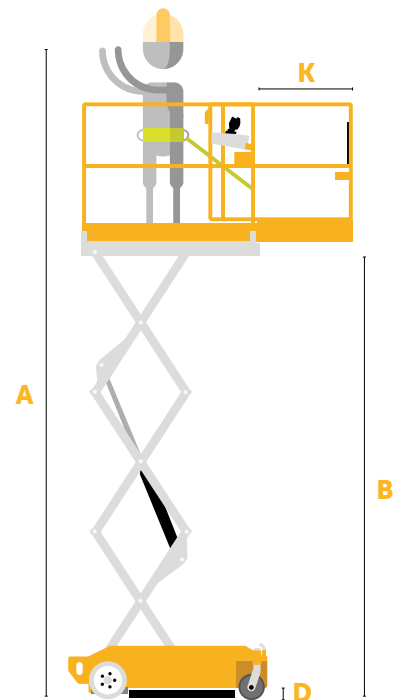

This brochure is for illustrative purposes only and based on the latest information available at the time of printing. Hy-Brid Lifts™ reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Hy-Brid Lifts™ is a trademark of Custom Equipment LLC. ©2021 Custom Equipment LLC. All rights reserved.  
08|20 Part No. ZT-0001