
ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

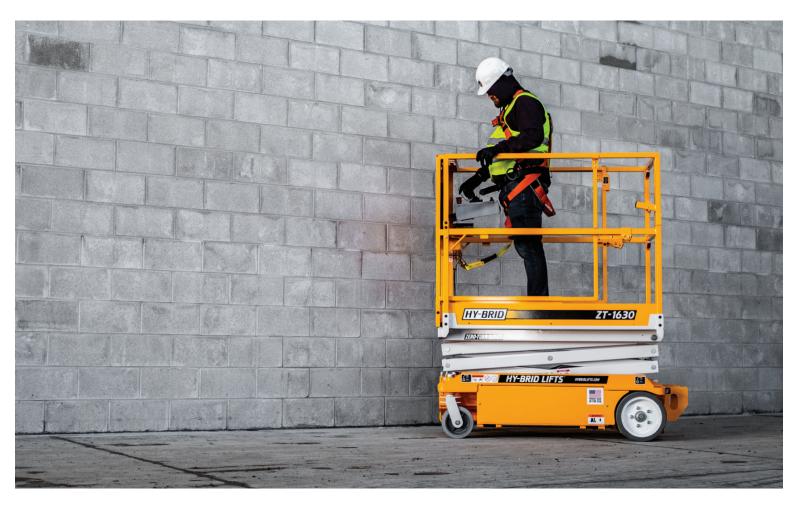

THE ULTIMATE COMPACT LIFT WITH PRECISION MANEUVERABILITY...

STANDARD FEATURES

- Proportional controls
- ▶ Electric drive & steer
- ▶ 110V-AC power-to-platform
- USB ports
- Horn
- Maintenance charger
- ▶ Total Control Drive System
- ▶ Hour meter
- Manual descent pull cable
- Active tilt alarm
- Active load-sensing
- ▶ Low floor load pressures

- Pothole protection
- Forklift pockets
- ▶ Zero-turn radius
- ▶ EZ-Glide slide out
- > 25% gradeability
- ▶ Solid rubber, non-marking wheels
- ▶ Lanyard attach points
- ▶ No folding rails
- ▶ Locking front wheel casters
- ▶ Removable platform controls
- Cantilever gate
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

OPTIONS

- ▶ Flashing beacon
- Inverter
- All motion alarm

STANDARDS COMPLIANCE

- NSI A92.20
- CSA B354.6:17




ZT-1630

ZERO-TURN SERIES

SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

SPE	CIFICATIONS		
A	Working Height (1 Person Indoor)	2 ft	6.7 m
В	Platform Height Maximum (1 Person Indoor)	5 ft	4.9 m
C	Platform Height Minimum 24	1 in	61 cm
D	Ground Clearance Elevated 0.9	5 in	1.3 cm
E	Ground Clearance Lowered 3.6	6 in	9.1 cm
F	Overall Length w/ Step 62	2 in	157.5 cm
G	Overall Width 30) in	76.2 cm
Н	Stowed Height 68	3 in	172.7 cm
1	Platform Length 53	3 in	134.6 cm
J	Platform Width 24	1 in	61 cm
К	Slide Out Extension Deck Length 30) in	76.2 cm
	Tires (Front/Rear) 8/1	l2 in	20.3/30.5 cm
PERFORMANCE			
11-1	RFORMANCE		
	ed Occupancy (Indoor)	1 P	erson
Rate	ed Occupancy (Indoor)	1 P	erson 294.8 kg
Rate	ed Occupancy (Indoor) form Capacity 650		
Rate Plat Slide	ed Occupancy (Indoor) form Capacity 650	O lbs O lbs	294.8 kg
Rate Plat Slide Gra	ed Occupancy (Indoor) form Capacity 650 e Out Extension Deck Capacity 250	O lbs O lbs 2	294.8 kg 113.4 kg
Rate Plat Slide Gra	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius	O lbs O lbs 2	294.8 kg 113.4 kg
Rate Plat Slide Gra Insid	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity deability de Turn Radius ve Speed Elevated (Proportional) 0.9	O lbs O lbs 2 Z	294.8 kg 113.4 kg 25% ero
Rate Plat Slide Gra Insid Driv	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius ve Speed Elevated (Proportional) 0.9	O lbs O lbs Z mph mph	294.8 kg 113.4 kg 25% Gero 0.4 m/s
Rate Plat Slide Gra Insid Driv Driv	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius ve Speed Elevated (Proportional) 0.9 ve Speed Lowered (Proportional) 2.7	O lbs O lbs Z mph mph 18/2	294.8 kg 113.4 kg 25% Sero 0.4 m/s 1.2 m/s
Rate Plat Slide Gra Insie Driv Driv Lift	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius ve Speed Elevated (Proportional) 0.9 ve Speed Lowered (Proportional) 2.7 Speed (Up/Down)	O lbs O lbs Z mph mph 18/2	294.8 kg 113.4 kg 25% Gero 0.4 m/s 1.2 m/s
Rate Plat Slide Gra Insie Driv Driv Lift	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius ve Speed Elevated (Proportional) 0.9 ve Speed Lowered (Proportional) 2.7 Speed (Up/Down) ver Source DOR LOADING	O lbs O lbs Z mph mph 18/2	294.8 kg 113.4 kg 25% Gero 0.4 m/s 1.2 m/s
Rate Plat Slide Gra Insid Driv Driv Lift Pow FLC	ed Occupancy (Indoor) Iform Capacity 650 e Out Extension Deck Capacity 250 deability de Turn Radius /e Speed Elevated (Proportional) 0.9 /e Speed Lowered (Proportional) 2.7 Speed (Up/Down) /ver Source DOR LOADING ight 178	O lbs O lbs Z mph mph 18/2	294.8 kg 113.4 kg 25% Gero 0.4 m/s 1.2 m/s
Rate Plat Slide Gra Insid Driv Driv Lift Pow FLC Wei	ed Occupancy (Indoor) Iform Capacity e Out Extension Deck Capacity deability de Turn Radius /e Speed Elevated (Proportional) /e Speed Lowered (Proportional) Speed (Up/Down) ver Source DOR LOADING ight 178 eel Load at Minimum Capacity	D lbs D lbs Z mph mph 18/2 24	294.8 kg 113.4 kg 25% Gero 0.4 m/s 1.2 m/s 18 sec V DC

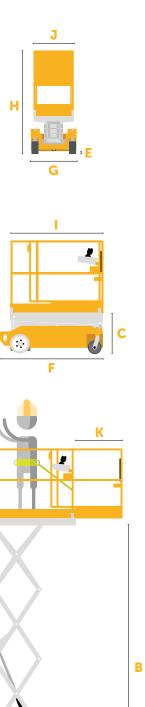

A

'(3)

